



PCT/CH 2004/000529



INVESTOR IN PEOPLE

REC'D 30 AUG 2004

WIPO

PCT

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

**PRIORITY  
DOCUMENT**


SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

Signed

*Andrew Gersey*

Dated 28 July 2004

**BEST AVAILABLE COPY**

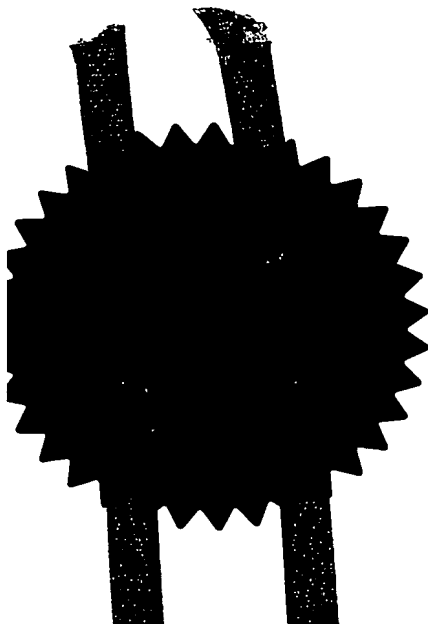

Patents Form 1/77 02 SEP 2003

Patents Act 1977  
(Rule 16)

RECEIVED BY FAX



1/77

**Request for grant of a patent**

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

**The Patent Office****Confirmation by Mail**

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

1. Your reference

30099 GB

02SEP03 EB34344-1 010149  
P01/7700 0.00-0320510.1

2. Patent application number

(The Patent Office will fill in this part)

02 SEP 2003

0320510.1

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Givaudan SA  
Chemin de la Parfumerie 5  
1214 Vernier  
Switzerland

Patents ADP Number (if you know it) 08408031001

If the applicant is a corporate body, give the country/state of its incorporation

Switzerland

4. Title of the Invention

DEVICE

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Centre for Innovative Technology (Givaudan UK Ltd.)  
76-80 Church Street, Staines  
Middlesex TW18 4XR  
United Kingdom

Patents ADP number (if you know it)

08447815001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day/month/year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day/month/year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:)

yes

a) any applicant named in part 3 is not an inventor, or  
b) there is an inventor who is not named as an applicant, or  
c) any named applicant is a corporate body.  
See note (d)

Patents Form 1/77

**Patents Form 1/77**

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 4 ✓

Claim(s) 1 ✓

Abstract 1 ✓

Drawing(s) 1 ✓

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77) 1 ✓

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature

Date 02/09/03

12. Name and daytime telephone number of person to contact in the United Kingdom

Colin Brown (office time) Tel. No: 01/784417721

**Warning**

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

**Notes**

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office

30099GB

DUPLICATE

1

## DEVICE

This invention relates to apparatus for disseminating volatile liquids into an atmosphere.

- 5 One very common method apparatus for disseminating a volatile liquid, such as a fragrance or an insecticide, into an atmosphere consists of a porous transfer member, such as a fibrous wick, that is in contact with a reservoir of volatile liquid. Liquid rises up this wick and evaporates into the atmosphere. This system has drawbacks, such as the low surface area for evaporation. It has been proposed to overcome this disadvantage by fitting to such a transfer
- 10 member an external capillary sheet, that is, a sheet extending essentially perpendicularly from the transfer member and that comprises channels of capillary dimensions, to which volatile liquid can pass and travel along for evaporation. This sheet generally contacts the transfer member by means of a hole in the sheet through which the transfer member protrudes and within which it fits snugly, at least some of these channels contacting the
- 15 transfer member such that liquid can transfer from the member to the sheet ("liquid transfer contact").

One of the problems encountered with such an apparatus is securing the necessary liquid transfer contact. If, to allow easy fitting, the hole in the sheet is too big with respect to the

20 wick diameter, even if only slightly so, the transfer of liquid will be diminished, and may not even take place at all. On the other hand, if the hole is too small and the sheet has to be forced on to the wick, the wick may be damaged. In addition, the desired good liquid transfer may not still take place, because that part of the sheet surrounding the hole may be deformed slightly in the direction of the top of the wick, thus reducing liquid transfer contractor or even

25 eliminating it completely. Moreover, the precision engineering that would be necessary to make a wick and sheet that matched with the necessary exactness would result in an unacceptably high price for a mass market production article, especially as fibrous wicks are extremely difficult to engineer accurately.

- 30 It has now been found that these problems can readily be overcome by a new construction. The invention therefore provides an apparatus adapted to disseminate volatile liquid into an atmosphere, the apparatus comprising a reservoir containing volatile liquid and, extending into and therefrom, an essentially cylindrical liquid transfer member that transfers liquid from

30099GB

2

the reservoir to an evaporating surface through which the transfer member passes by means of a hole in the evaporating surface, the evaporating surface comprising a rigid sheet that extends essentially laterally from the transfer member and that bears on its surface capillary channels adapted to accept liquid from the transfer member and spread it over the surface of the evaporating surface, the transfer member being elastically compressible in diameter, with a diameter in its non-compressed form greater than that of the hole, and, prior to putting into service of the apparatus, being held in a compressed form of diameter smaller than that of the hole, such that, when the compression is released, the transfer member expands into liquid transfer contact with the evaporating surface.

10

The invention additionally provides a method of ensuring optimum liquid transfer contact between a transfer member adapted to transfer volatile liquid to be disseminated into an atmosphere and a capillary channel-bearing evaporating surface that makes liquid transfer contact with the transfer member by means of a hole through which the transfer member protrudes, comprising supplying the transfer member in compressed form, such that its compressed diameter is smaller than that of the hole but its uncompressed diameter is at least equal to that of the hole, and, in putting the apparatus into service, of releasing the compression.

20 The reservoir and the evaporating surface may be any suitable reservoir or any suitable evaporating surface made of any suitable material. Reservoirs are well known to the art and suitable evaporating surfaces are described in, for example, co-pending British patent application No. GB 0306449.

25 The liquid transfer member may be any suitable member, with the proviso that it must be capable of being elastically compressed to a diameter smaller than its uncompressed diameter, such that

(a) the compressed diameter is sufficiently small such that the compressed diameter held in a sleeve is sufficiently small such that the external diameter of the sleeve matches that of

30 the hole in the evaporating surface; and

(b) the uncompressed diameter is greater than that of the hole in the evaporating sheet.

30099GB

3

Provided that the liquid transfer member meets the compressibility criteria specified hereinabove, the material from which the transfer member is made may be any suitable material. Although it is advantageously any of the materials already known and used in the manufacture of air freshener wicks and the like, from the point of view of availability,

- 5 reliability and cheapness, it is not restricted to these, and the skilled person will readily be able to select a suitable material for any given application. Typical examples of suitable transfer member material include natural fibres such as cellulose and synthetic fibres such as polyester, nylon and polypropylene. A typical example of a polyester fibrous wick contained within a non-woven outer sheath is the Sorbarod range of products from Baumgartner
- 10 Fibertec SA, Crisser-Lausanne, Switzerland.

The means by which the transfer member is compressed and held in a compressed state may be any suitable means. For example, the compression retention means for the transfer member may be a sleeve or cap of material sufficiently rigid to resist the pressure of the transfer member seeking to return to normal size. This is typically a plastics material, but other materials such as ceramics or metals may be used, if desired. A cap is a preferred member, as it prevents leakage or evaporation. The compression of the transfer member may be achieved by any convenient means, for example, by extruding the transfer member in compressed form into the retention means.

20

- The compression retention means described hereinabove may be held in place by any suitable means prior to its removal when the apparatus is put into operation. For example, if it is a cap, it may have a screw fitting that cooperates with a screw fitting on the neck of the reservoir. In another embodiment, it may be part of the closure of the reservoir and able to be
- 25 broken off when operation of the apparatus is desired, for example, by making weak part of the cap, so that it will break at that point.

The evaporating surface is a capillary sheet, that is, a sheet of rigid material that comprises in at least one of its surfaces capillary channels. At least some of these channels are in liquid transfer contact

30

The apparatus according to the invention may be supplied in one part, or it may be supplied in two parts, evaporating surface and reservoir/transfer member/compression retention

30099GB

4

means. To put such an apparatus into operation, the evaporating surface is put over the sleeve, and the sleeve is then removed. The evaporating member is held in such a position that the subsequent expansion of the transfer member will bring it into liquid transfer contact with the evaporating surface. Any suitable means may be used here, for example, a shoulder  
5 built into a cap that both covers the transfer member and acts as the sleeve. This cap can be designed to snap off at an appropriate place by its being twisted, allowing the transfer member to expand.

The invention is further described with reference to the drawing, which depict a preferred  
10 embodiment and is not intended to be limiting in any way on the scope of the invention.

A reservoir 1 contains a volatile liquid, to be disseminated into an atmosphere. The reservoir has the form of a bottle with a neck, into which neck fits an insert 3. The insert has a central orifice, through which tightly fits a porous wick 4. The wick extends from near the bottom of  
15 the reservoir through the insert 3 into the atmosphere, thus providing the only means for the liquid leave the reservoir and reach the atmosphere. That part of the wick 4 protruding from the insert 3 is completely covered by a cap 5 that extends down to the insert 3. This part of the wick is compressed from its natural size and is held at reduced size by the cap 5. Around the cap 5 is fitted a capillary sheet 6, by means of an orifice in the sheet whose diameter  
20 matches the outer diameter of the cap 5, but which diameter is smaller than the normal diameter of the wick 4.

When the cap 5 is removed, the wick 4 expands to its normal diameter. In doing this, it makes tight contact with the orifice in the capillary sheet 6. This contact holds the capillary  
25 sheet 6 tightly in place and allows the passage of liquid from the wick 4 to the capillary sheet 6 for evaporation into the atmosphere.

30

30099GB

5

## Claims:

1. An apparatus adapted to disseminate volatile liquid into an atmosphere, the apparatus comprising a reservoir containing volatile liquid and, extending into and therefrom,  
5 an essentially cylindrical liquid transfer member that transfers liquid from the reservoir to an evaporating surface through which the transfer member passes by means of a hole in the evaporating surface, the evaporating surface comprising a rigid sheet that extends essentially laterally from the transfer member and that bears on its surface capillary channels adapted to accept liquid from the transfer member and  
10 spread it over the surface of the evaporating surface, the transfer member being elastically compressible in diameter, with a diameter in its non-compressed form greater than that of the hole, and, prior to putting into service of the apparatus, being held in a compressed form of diameter smaller than that of the hole, such that, when the compression is released, the transfer member expands into liquid transfer contact  
15 with the evaporating surface.
2. A method of ensuring optimum liquid transfer contact between a transfer member adapted to transfer volatile liquid to be disseminated into an atmosphere and a capillary channel-bearing evaporating surface that makes liquid transfer contact with  
20 the transfer member by means of a hole through which the transfer member protrudes, comprising supplying the transfer member in compressed form, such that its compressed diameter is smaller than that of the hole but its uncompressed diameter is at least equal to that of the hole, and, in putting the apparatus into service, of releasing the compression.



30099GB


6

## ABSTRACT

An apparatus adapted to disseminate volatile liquid, such as a fragrance, into an atmosphere comprises a reservoir containing volatile liquid and, extending into and therefrom, an  
5 essentially cylindrical liquid transfer member that transfers liquid from the reservoir to an evaporating surface through which the transfer member passes by means of a hole in the evaporating surface. The evaporating surface comprises a rigid sheet that extends essentially laterally from the transfer member and bears on its surface capillary channels adapted to accept liquid from the transfer member and spread it over the surface of the evaporating  
10 surface. The transfer member is elastically compressible in diameter, with a diameter in its non-compressed form greater than that of the hole, and, prior to putting into service of the apparatus, is held in a compressed form of diameter smaller than that of the hole, such that, when the compression is released, the transfer member expands into liquid transfer contact with the evaporating surface. This ensures optimal liquid transfer contact between transfer  
15 member and evaporating surface.

30099GB

1/1

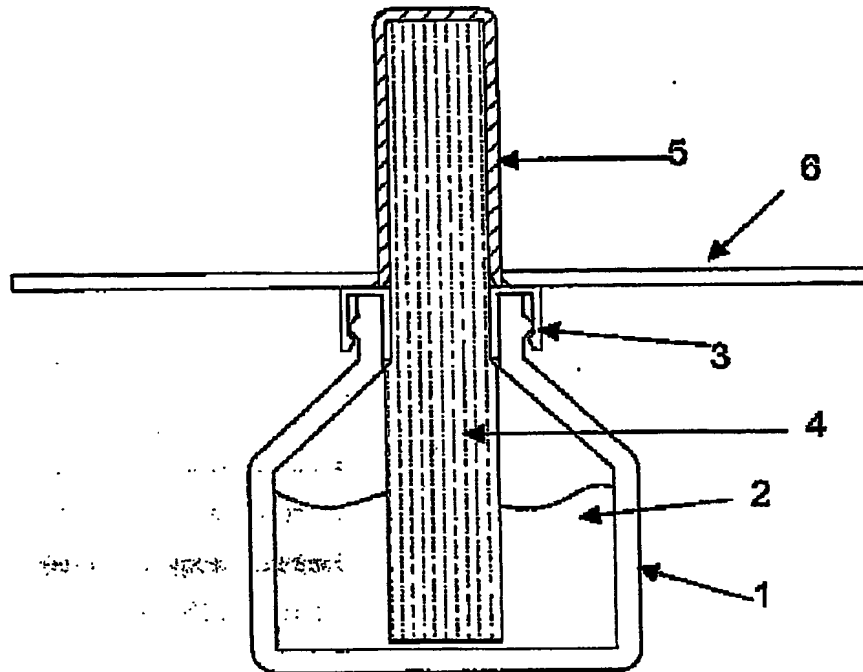

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**